



**APOLLO® SEA FLANGE VALVES**



**FULL FLOW**

An 85-5-5-5 bronze ball type valve developed to replace plug and other types of sea cocks in the boating industry. Features like these make the full flow Apollo® Sea Flange your best choice for long-lasting performance and value.

**FEATURES**

- UL Listed
- All AYBA Recommended Materials
- All Bronze Wetted Metallic Components
- Large Flow Ports (Designated by "F" at the End of the Part #)\*\*
- RPTFE Seats and Seals
- Chromium Plated Bronze Ball—Resists Damage from Marine Growth
- Easy On-Off Operation
- Winterizing Drain Plug
- No Thumb Screws to Create Seal
- Stainless Steel Lever and Nut
- Compact, Streamlined Efficient Design
- No Lubrication Required
- Bonding Screw Standard


**DIMENSIONS**

PART NUMBER	SIZE	DIMENSIONS (IN.)								WT. (LB.)
		A	B	C	D	E	F	G	H	
78-115-01F**	3/4"	0.75	1.56	3.62	2.16	4.78	0.34	3.12	0.06	2.70
78-118-01	1"	1.00	1.87	4.25	2.62	5.50	0.34	3.37	0.25	3.80
78-119-01	1-1/4"	1.25	2.15	4.81	2.81	5.50	0.34	3.62	0.37	5.75
78-116-01F**	1-1/2"	1.50	2.37	5.21	3.13	5.37	0.34	4.50	0.34	7.25
78-120-01	2"	2.00	2.84	6.25	4.68	8.00	0.34	5.00	0.87	12.90
78-117-01	2-1/2"	2.50	3.18	6.87	4.00	8.00	0.34	5.87	1.00	18.20
78-121-01A	3"	3.12	3.54	7.23	5.21	9.93	0.40	7.00	1.25	21.18
78-122-01A	4"	4.00	3.75	8.06	5.68	9.93	1.13	8.44	1.90	33.05

Contact Customer Service for availability on locking handle option  
 \*\* Large flow ports

**COMPONENTS**

1	Lever & Grip
2	Gland Screw
3	Stem Seals
4	Body Seal, Except 3"- 4"
5	Retainer
6	Ball
7	Seat (2)
8	Stem
9	Body
10	Lever Nut
11	Plug

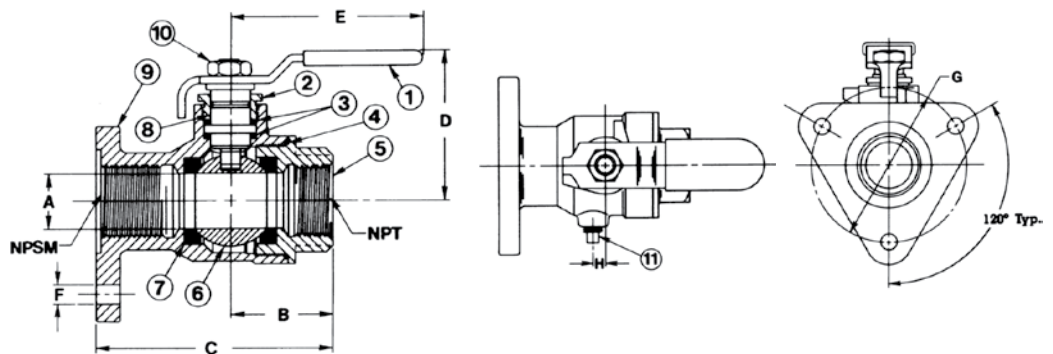

**ECONOMY**

Same great features and quality all-bronze construction as Full Flow Sea Flange valves, but with standard port design and lower cost.

**DIMENSIONS**

PART NUMBER	SIZE	DIMENSIONS (IN.)								WT. (LB.)
		A	B	C	D	E	F	G	H	
78-115-01	3/4"	0.68	1.50	3.50	2.18	4.87	0.34	3.12	0.06	2.32
78-116-01	1-1/2"	1.25	2.18	4.81	2.87	5.50	0.34	4.50	0.18	6.30

Contact Customer Service for availability on locking handle option

**NOTE:** Apollo® Marine Valves used in applications where marine growth can become intrusive should be actuated to the fully closed and fully open positions as often as once per month and at minimum once every other month. Such cycling of these valves can reduce the effort needed to open and close the valves while also helping to clear marine growth buildup on components.



GENERAL  
*Marine*  
 SERVICES

156 Beaumont Street · Westhaven · Auckland · New Zealand  
 Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz  
 Service Ph +64 9 368 0938 · service@generalmarine.co.nz

[www.generalmarine.co.nz](http://www.generalmarine.co.nz)