




### 32-100 SERIES

#### REGULAR PORT, THREADED END, BRONZE BALL VALVE



NPT threaded ball valve rated to 400 psig CWP, non-shock and 125 psig for saturated steam. Blowout-proof stem design with adjustable packing gland.

#### FEATURES

- ASTM B584 Bronze
- PTFE Seats and MPTFE Stuffing Box Ring
- **Made in USA**

#### OPTIONS


- (-04) 2-1/4" Stem Extension
- (-07) CS Tee Handle
- (-15) Round Handle
- (-27) Locking Handle

#### DIMENSIONS

| MODEL NUMBER | SIZE   | DIMENSIONS (IN.) |      |      |      |      |
|--------------|--------|------------------|------|------|------|------|
|              |        | A                | B    | C    | D    | E    |
| 32-101-01    | 1/4"   | 0.37             | 0.80 | 1.60 | 1.65 | 2.87 |
| 32-102-01    | 3/8"   | 0.37             | 0.80 | 1.60 | 1.65 | 2.87 |
| 32-103-01    | 1/2"   | 0.40             | 1.00 | 2.00 | 1.68 | 2.87 |
| 32-104-01    | 3/4"   | 0.65             | 1.20 | 2.41 | 1.90 | 3.87 |
| 32-105-01    | 1"     | 0.75             | 1.55 | 3.09 | 2.18 | 4.87 |
| 32-106-01    | 1-1/4" | 1.00             | 1.72 | 3.44 | 2.53 | 5.50 |
| 32-107-01    | 1-1/2" | 1.12             | 1.93 | 3.87 | 2.69 | 5.50 |
| 32-108-01    | 2"     | 1.50             | 2.17 | 4.37 | 2.94 | 5.50 |

### 78-600/900 SERIES

#### BRONZE BALL VALVE WITH CENTER DRAIN

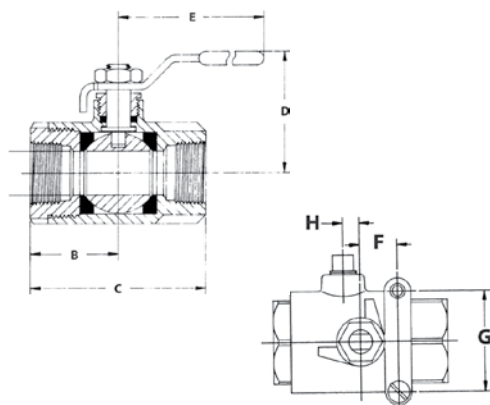

Center tap drain allows winterization of the valve. Bonding screw allows valve to be connected to the vessel's bonding system.

#### FEATURES

- Bronze Body
- Chromium Plated Brass Ball
- PTFE Seats and stuffing Box Ring
- Blowout-Proof Stem Design
- Stainless Steel Lever and Nut
- Mounting Pads
- Tapered Pipe Threads

#### DIMENSIONS

| PART NUMBER | SIZE   | DIMENSIONS (IN.) |      |      |      |      |      |      |      | WT. (LB.) |
|-------------|--------|------------------|------|------|------|------|------|------|------|-----------|
|             |        | A                | B    | C    | D    | E    | F    | G    | H    |           |
| 78-664-01   | 3/4"   | 0.68             | 1.50 | 3.00 | 2.12 | 4.87 | 0.87 | 1.37 | 0.17 | 1.53      |
| 78-665-01   | 1"     | 0.87             | 1.68 | 3.37 | 2.25 | 4.87 | 0.87 | 1.37 | 0.21 | 1.86      |
| 78-666-01   | 1-1/4" | 1.00             | 2.00 | 4.00 | 2.62 | 5.50 | 0.93 | 1.50 | 0.28 | 3.39      |
| 78-667-01   | 1-1/2" | 1.25             | 2.18 | 4.37 | 3.05 | 8.00 | 0.93 | 1.50 | 0.40 | 4.68      |
| 78-962-01   | 2"     | 1.50             | 2.34 | 4.69 | 3.24 | 8.00 | 0.93 | 1.50 | 0.45 | 5.72      |



GENERAL  
*Marine*  
SERVICES

156 Beaumont Street · Westhaven · Auckland · New Zealand

Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz

Service Ph +64 9 368 0938 · service@generalmarine.co.nz

[www.generalmarine.co.nz](http://www.generalmarine.co.nz)