

**Filtro depurazione acqua a squadra con flange PN6/PN16**  
Vertical intake water strainer with PN6/PN16 flanges

**Filtro omologato RINA MAC**  
RINA MAC certificate



**Tabella flange a pag. 182**  
Flange table on page 182

\* Con flangia PN16  
With flange PN16

<b>1283</b>	10500	13700	16400	23800	32600	45000	63000	95000
Weight (gr)*	10500	13700	16400	23800	32600	45000	63000	95000
<b>3283</b>	3600	4900	5800	7600	10300	14200	19900	30000
Weight (gr)*	3600	4900	5800	7600	10300	14200	19900	30000
H	275	324	347	375	453	505	570	660
H1	170	200	218	250	300	342	370	430
L1	110	125	135	155	175	200	232	278
L	183	227	245	278	314	362	421	501
<b>DN</b>	<b>50</b>	<b>65</b>	<b>80</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>200</b>	<b>250</b>


**Bronzo**  
Bronze

**3283**



**Alluminio anodizzato nero**  
Black anodized aluminium

**Diagramma portate - perdite di carico**  
Flow rate - loss of pressure diagram

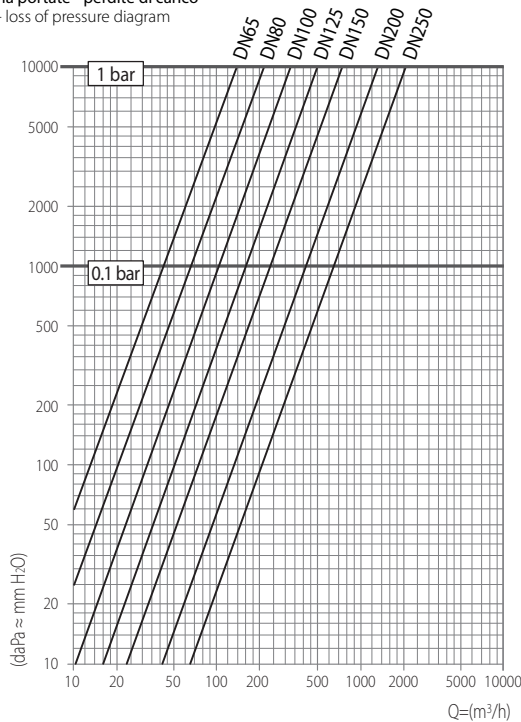

**Corpo in bronzo / Alluminio anodizzato nero**  
Bronze / Black anodized aluminium casing

**Elemento filtrante in acciaio inox AISI 316L**  
AISI 316L stainless steel inside filter

**Coperchio in bronzo / Alluminio anodizzato nero**  
Bronze / Black anodized aluminium cover

**Guarnizioni in neoprene**  
Neoprene o-ring

<b>DN</b>	<b>0.1 bar</b>	<b>1 bar</b>
65	43500	139000
80	66800	210000
100	104000	328000
125	160000	507000
150	231000	730000
200	410000	1298000
250	641000	2028000

**Portate di acqua attraverso il filtro pulito - lt/h**  
Flow-rate capacity through the clean filter - lt/h