


**1504**

**Filtro a 45°**  
45° filter

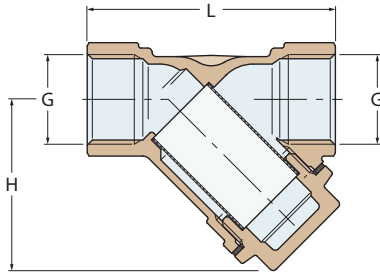


FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

1504	■	■	■	■	■	■	■	■	■
PN	20	20	20	20	20	20	20	20	20
Weight (gr)	150	130	140	220	420	605	830	1330	
H	40	40	40	50	60	68	75	90	
L	55	55	58	70	87	96	106	126	
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	

Ottone sabbiato  
Yellow brass

**1530**

**Valvola di fondo tenuta gomma**  
Rubber disk foot-valve




FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

1530	■	■	■	■	■	■	■	■	■
PN	10	10	10	8	8	6	6	6	6
Weight (gr)	200	300	505	595	910	1500	2120	3580	6135
H	70	82	95	103	121	137	173	199	239
D	45	51	62	69	80	100	121	145	180
G	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"

Ottone sabbiato  
Yellow brass

**1531**

**Valvola di fondo tubolare tenuta gomma**  
Tubular rubber gasket foot-valve

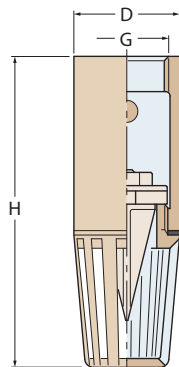

FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

1531	■	■	■	■	■	■	■	■
PN	10	10	10	8	8	6	6	6
Weight (gr)	200	280	400	600	865			
H	95	111	126	140	164			
D	30	37	46	52	63			
G	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

Ottone sabbiato  
Yellow brass