


**1532**



**Valvola di ritegno a molla - chiusura POM/NBR**  
Spring check valve - POM/NBR closing system




FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

Ottone sabbiato  
Yellow brass

1532	■	■	■	■	■	■	■	■	■	■	
PN	16	16	16	16	16	10	10	10	8	8	8
Weight (gr)	90	75	100	155	225	350	470	710	1260	1810	3100
H	45	45	48	53	59	66	71	80	93	104	119
D	29	29	30	37	44	56	63	78	103	120	155
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

**1533**

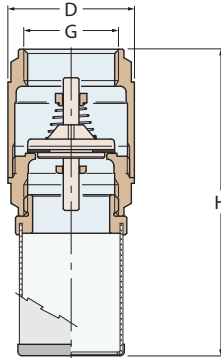

**Valvola di fondo a molla - chiusura POM/NBR con filtro inox**  
Foot-valve - POM/NBR closing system with stainless steel filter




FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

Ottone sabbiato  
Yellow brass

1533	■	■	■	■	■	■	■	■	■	■
PN	16	16	16	16	16	16	16	16	16	10
Weight (gr)	95	125	190	285	415	550	860	1510	2180	3550
H	88	91	102	113	125	140	164	177	193	234
D	29	30	37	44	56	63	78	103	120	155
G	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

**FI1533**



**Filtro inox per valvola di fondo**  
Stainless steel filter for foot-valve



FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

Acciaio inox  
Stainless steel

FI1533	■	■	■	■	■	■	■	■	■	■
for Art. 1533										
Weight (gr)	15	20	35	50	90	100	140	200	270	390
H1	36	36	41	47	52	62	77	75	90	105
H	49	49	55	63	69	79	94	96	111	127
D	19	23	30	37	45	49.5	62	81	93.5	116
G	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"