



GAC SERIES GRANULAR ACTIVATED CARBON CARTRIDGES

- **Effective bad taste & odor and chlorine taste & odor reduction***
- **Designed for maximum adsorption**
- **Post-filter to reduce carbon fines**
- **Available in a variety of sizes and flow rates**

GAC Series cartridges effectively reduce unwanted tastes, odor and chlorine taste & odor from your drinking water.* They are designed to allow maximum contact between the water and carbon, ensuring maximum adsorption.

The construction of the cartridge allows water to enter at one end and pass through the entire length of the carbon bed before exiting the other end of the cartridge, while an internal expansion pad minimizes channeling or bypass. Before the water exits the cartridge, a 20-micron post filter helps reduce carbon fines and other suspended particles from the filtered water. The post-filter is permanently fastened

to an innovative support basket ensuring that it is firmly secured and eliminating any potential for bypass.


GAC Series cartridges are available in a variety of sizes and flow rates, and effectively provide good general-purpose drinking water filtration.

* Based on manufacturer's internal testing.



GAC SERIES

Granular Activated Carbon Cartridges

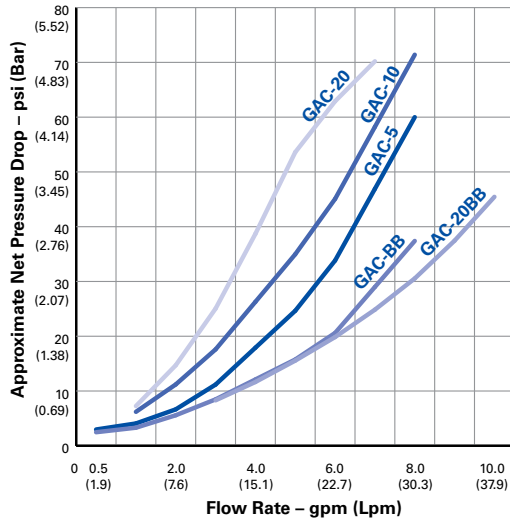

Cartridge Specifications and Performance Data

| Model | Maximum Dimensions | Initial ΔP (psi) @ Flow Rate (gpm) | Chlorine Taste & Odor Reduction @ Flow Rate |
|----------|-----------------------------------|---------------------------------------|--|
| GAC-5 | 2 7/8" x 4 7/8" (73 mm x 124 mm) | 3.0 psi @ 0.5 gpm (0.2 bar @ 1.9 Lpm) | 250 gallons @ 0.5 gpm (900L @ 1.9 Lpm) |
| GAC-10 | 2 7/8" x 9 3/4" (73 mm x 248 mm) | 7.0 psi @ 1.0 gpm (0.5 bar @ 3.8 Lpm) | 5,000 gallons @ 1.0 gpm (18,900L @ 3.8 Lpm) |
| GAC-20 | 2 7/8" x 20" (73 mm x 508 mm) | 16 psi @ 2.0 gpm (1.1 bar @ 7.6 Lpm) | 10,000 gallons @ 2.0 gpm (37,800L @ 7.6 Lpm) |
| GAC-BB | 4 1/2" x 9 3/4" (114 mm x 248 mm) | 6.0 psi @ 2.0 gpm (0.4 bar @ 7.6 Lpm) | 12,500 gallons @ 2.0 gpm (47,000L @ 7.6 Lpm) |
| GAC-20BB | 4 1/2" x 20" (114 mm x 508 mm) | 5.0 psi @ 4.0 gpm (0.3 bar @ 15 Lpm) | 25,000 gallons @ 4.0 gpm (95,000L @ 15 Lpm) |

* Based on manufacturer's internal testing

Materials of Construction

| | |
|--------------------|-------------------------------------|
| Filter Media | Granular Activated Carbon |
| End Caps | Polystyrene |
| Post-Filter | Spun Polypropylene |
| Outer Casing | Polystyrene |
| Expansion Pad | Polypropylene |
| Gasket | Buna-N (top) Santoprene (bottom) |
| Temperature Rating | 40–125°F (4.4–51.7°C) |



The GAC-10 and GAC-20BB are Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: A drinking water cartridge may contain carbon fines (very fine black powder). After installation and before using the water, follow the instructions for flushing the cartridge to remove fines.

NOTE: It is recommended that you flush for 20 seconds prior to using the water for drinking or cooking purposes.

NOTE: Chlorine Reduction is estimated capacity using 2ppm free available chlorine (FAC) at continuous flow with greater than 75% reduction.



GENERAL
Marine
SERVICES

156 Beaumont Street · Westhaven · Auckland · New Zealand

Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz

Service Ph +64 9 368 0938 · service@generalmarine.co.nz

www.generalmarine.co.nz