




TRIDENT MARINE®

TRIDENT WET EXHAUST ELBOWS

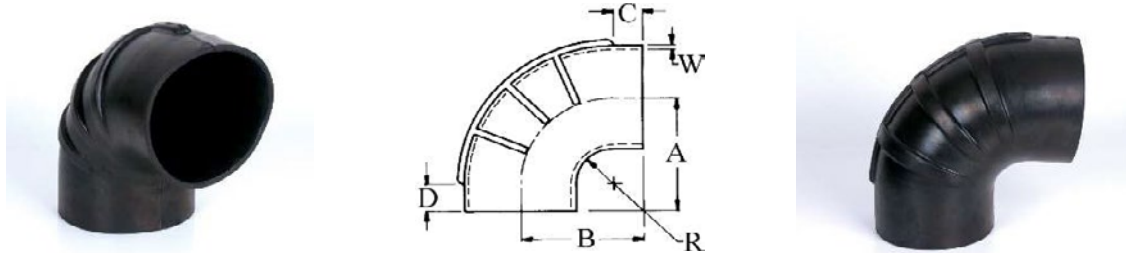

TRL 90° Series

Trident EPDM marine wet exhaust connections. Molded of high temperature black EPDM rubber with a smooth bore and cover; except elbows of 6" I.D. or bigger have molded reinforcing ribs on the outside. These elbows have excellent resistance to ozone, salt water, diesel fumes and splash, cold, heat, and aging. Exceeds (SAE J2006-R1, and ABYC & NMMA P-1 exhaust standards). Black High Temp EDPM Rubber 250°F (121°C) max continuous. 5 Year Warranty.

Specifications

Construction:

High Temp EDPM Rubber.

Color: Black

Reinforcement: Reinforcing Ribs on 6" I.D. and above

Temperature Range: up to 250°F (121°C)

Part Number	ID		A		B		C		D		R		W		Elbow Deg.	Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		Lb/ Ea	Kg/ Ea
TRL-290	2	50.8	4.25	108	4.25	108	2	50.8	2	50.8	2	50.8	0.2	5.1	90°		
TRL2590	2.5	63.5	4.5	114	4.5	114	1.75	44.4	1.75	44.4	2	50.8	0.2	5.1	90°		
TRL-390	3	76.2	5.25	133	5.25	133	1.75	44.4	1.75	44.4	2	50.8	0.25	6.4	90°		
TRL-3590	3.5	88.9	5.5	140	5.5	140	1.75	44.4	1.75	44.4	2	50.8	0.25	6.4	90°		
TRL-490	4	101.6	5.75	146	5.75	146	1.75	44.4	1.75	44.4	2	50.8	0.25	6.4	90°		
TRL-4590	4.5	114.3	6	152	6	152	1.75	44.4	1.75	44.4	1.75	44.4	0.25	6.4	90°		
TRL-590	5	127	6	152	6	152	1.75	44.4	1.75	44.4	1.75	44.4	0.25	6.4	90°		
TRL-6590	6 x 5	152x127	6.25	178	6.25	178	1.5	38	1.5	38	1.5	38	0.31	7.9	90°		
TRL-690	6	152.4	7	178	7	178	2.25	57	2.25	57	1.75	44.4	0.25	6.4	90°		
TRL-690EL	6	152.4	9.1	310	9.1	231	2	50.8	2	50.8	2	50.8	0.25	6.4	90°		
TRL-890	8	203	8.5	216	8.5	216	2	50.8	2.25	57	2.12	54	0.37	9.4	90°		
TRL-1090	10	254	10.5	267	10.5	267	2.25	57	2.25	57	2.25	57	0.37	9.4	90°		

*To add 4 x #720 series Stainless Steel T-Bolt Clamps, add "SS" to the end of the part number. (TRL-390SS)

TRIDENT RUBBER INC.
585 PLUM RUN ROAD
CANONSBURG PA, 15317

1-800-414-2628

WWW.TRIDENTMARINE.COM



GENERAL
Marine
SERVICES

156 Beaumont Street · Westhaven · Auckland · New Zealand

Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz

Service Ph +64 9 368 0938 · service@generalmarine.co.nz

www.generalmarine.co.nz