

CONNECTOR (Adapter) 90°- FEMALE to MALE THREAD -

Designed and made in New Zealand, TruDesign Connectors / Adapters are moulded from a glass reinforced nylon composite. High strength, high-modulus, glass reinforced nylon provides dramatic strength, stiffness, toughness, and dimensional stability.



For above water line only. ISO and ABYC require a TruDesign Ball Valve to be directly fitted to a skin fitting in below the water line applications.

Features

Feature :	
Manufactured from a glass reinforced nylon composite	High strength and light weight.
When connected to Skin Fitting	Must be above water line. Below water line skin fittings must have a Ball Valve directly fitted to it.
Compatible with all hull types	Can be used on aluminum, steel, wood or FRP hulls.
Immune to corrosion and electrolysis	Long life with no concerns over decreased performance due to corrosion.
Chemical resistant	Impervious to diesel, petrol and antifouling paints.
UV resistant	These fittings will not break down with ultraviolet light or discolour from the sun.
High quality surface finish	Will not discolour with green film as similar bronze fittings do.
Fits TruDesign Skin Fittings, Ball Valves & BSP threads	Universal compatibility to other TruDesign fittings, and other marine components.
Large operating temperature range	Suitable for all marine environments, from -40°C to +110°C.





Model

Part #	BSP Thread Description
90777	Connector 3/4" BSP F 3/4" M 90°
90778	Connector 3/4" BSP F 3/4" M 90° PKG
90779	Connector 1" BSP F 1" M 90°
90780	Connector 1" BSP F 1" M 90° PKG
90632	Connector 1 1/4" BSP F 1 1/4" M 90°
90638	Connector 1 1/4" BSP F 1 1/4" M 90° PKG
90630	Connector 1 1/2" BSP F 1 1/2" M 90°
90636	Connector 1 1/2" BSP F 1 1/2" M 90° PKG
90628	Connector 2" BSP F 2" M 90°
90634	Connector 2" BSP F 2" M 90° PKG

PKG product is supplied in TruDesign branded bags

Part #	NPS Thread Description
90825	Adapter 3/4" NPS F 3/4" M 90°
90826	Adapter 3/4" NPS F 3/4" M 90° PKG
90827	Adapter 1" NPS F 1" M 90°
90828	Adapter 1" NPS F 1" M 90° PKG
90829	Adapter 1 1/4" NPS F 1 1/4" M 90°
90830	Adapter 1 1/4" NPS F 1 1/4" M 90° PKG
90831	Adapter 1 1/2" NPS F 1 1/2" M 90°
90832	Adapter 1 1/2" NPS F 1 1/2" M 90° PKG
90833	Adapter 2" NPS F 2" M 90°
90834	Adapter 2" NPS F 2" M 90° PKG

PKG product is supplied in TruDesign branded bags

Installation

For thread sealing see TruDesign Technical information sheet on our web site www.trudesignplastics.com - for suitable sealants.

Flow diameter and thread length

Female Thread	Thread Length	Male Thread	Thread Length	Minimum I.D.
3/4"	30mm	3/4"	30mm	12mm
1"	30mm	1"	30mm	18mm
1 1/4"	30mm	1 1/4"	30mm	24mm
1 1/2"	30mm	1 1/2"	30mm	30mm
2"	30mm	2"	30mm	42mm

Weight

Size	Weight (g)	Weight (oz)
3/4"	44	1.6
1"	63	2.2
1 1/4"	96	3.4
1 1/2"	117	4.1
2"	163	5.7

LEADERS IN MARINE COMPOSITE FITTINGS

www.trudesignplastics.com
Rev B




GENERAL
Marine
SERVICES

156 Beaumont Street · Westhaven · Auckland · New Zealand
Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz
Service Ph +64 9 368 0938 · service@generalmarine.co.nz

www.generalmarine.co.nz

Dimensions

All dimensions nominal.

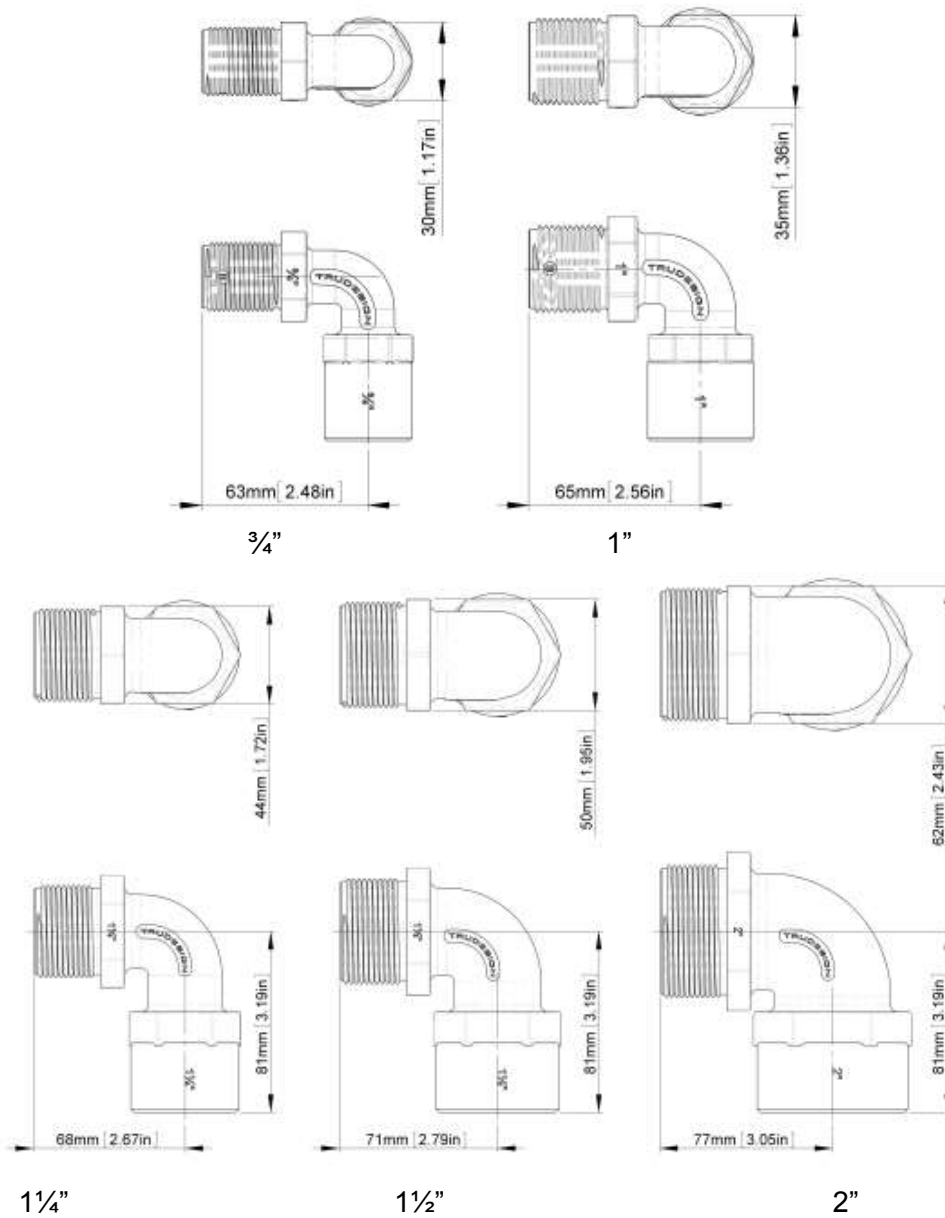

The information contained in this information sheet is for general information purposes only. The information is provided by TruDesign™ and while we endeavour to keep the information up to date and correct, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability. Any reliance you place on such information is therefore strictly at your own risk.

LEADERS IN MARINE COMPOSITE FITTINGS

www.trudesignplastics.com
Rev B



**GENERAL
Marine
SERVICES**

156 Beaumont Street · Westhaven · Auckland · New Zealand
Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz
Service Ph +64 9 368 0938 · service@generalmarine.co.nz

www.generalmarine.co.nz